


## Splitters with F connectors 5-2400MHz

## SPTR

## PASSIVE

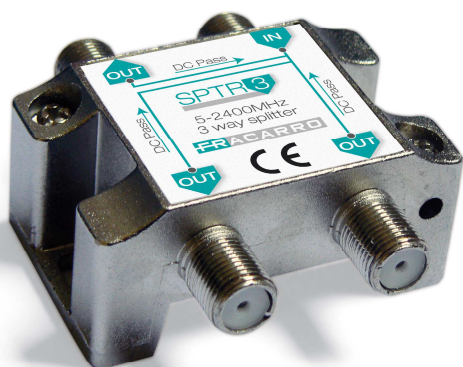

New CATV splitters on frequency range 5-2400MHz with "top down" F connectors.

Compact and good-looking design to fulfil every installation requirement and enable them to be installed in every location.

Zinc die cast housing allows to reach the best performances over all the operating frequency range, with low insertion loss up to high frequencies and high isolation between outputs.

DC pass is allowed between every output and input.

## Caratteristiche principali

- **Low insertion loss** also on SAT band, up to 2400MHz.
- **Changeless attenuation on output ports** from 5 to 2400MHz.
- **DC pass** from outputs to input
- **High return loss**
- **"A" shielding factor**
- **2 earthing screws**
- **Wall fixing**

## SPLITTERS

Item	Code	Insertion Loss					Separation Out-Out				
		40 MHz	862 MHz	950 MHz	2150 MHz	2400 MHz	40 MHz	862 MHz	950 MHz	2150 MHz	2400 MHz
		dB	dB	dB	dB	dB	dB	dB	dB	dB	dB
SPTR2	287305	3,5	4	4	5	5,5	27,5	20	20	18	18
SPTR3	287307	6	7	7	9	9,5	.25	20	20	20	18
SPTR4	287306	7	8	8	9,5	10	20	20	20	18	18
SPTR6	287308	10	11	11,5	14,5	16	27,5	25	25	25	25
SPTR8	287309	11	12,5	12,5	15,5	16	27,5	25	25	25	25

Fracarro Code	Item	Packing	EAN Code	Quantity	Dimensions	Net Weight	Weight
				Pc	mm	kg	kg
287305	SPTR2	Multiple	8016978094820	10	112x127x64	0.82	0.90
287307	SPTR3	Multiple	8016978094844	10	112x127x64	0.82	0.90
287306	SPTR4	Multiple	8016978094875	10	155x127x64	1.03	1.10
287308	SPTR6	Multiple	8016978094899	10	122x254x64	1.43	1.50
287309	SPTR8	Multiple	8016978094912	10	122x254x64	1.43	1.50